
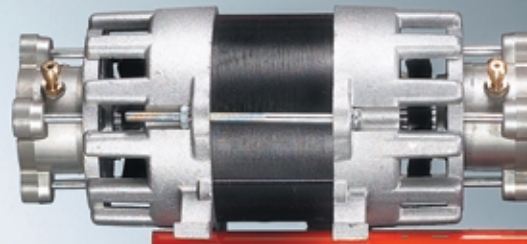


POMPE PER VUOTO ROTATIVE A PALETTE



ROTARY VANE VACUUM PUMPS

R19D A.C.

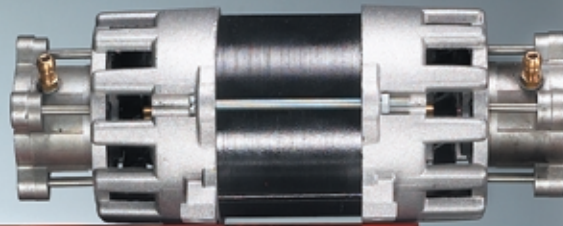

R15D A.C.

R19S A.C.

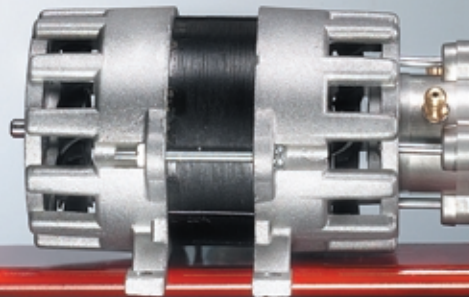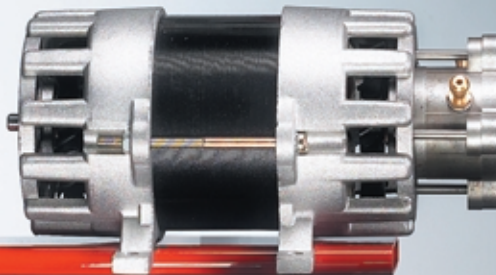

R15S A.C.



Le pompe per vuoto rotative a palette hanno il corpo pompa composto da statore e coperchi in materiale sinterizzato, rotore in ottone e palette in acciaio temperato.

Vengono fornite complete di motore alimentato in corrente alternata monofase oppure in corrente continua.

Oltre che per generare vuoto possono essere utilizzate in alcuni casi per comprimere aria.

Possono essere fornite in versione con singolo o con doppio corpo pompa. La versione con doppio corpo pompa consente l'utilizzo sia in parallelo che in serie. Le pompe rotative a palette sono prive di manutenzione.




Rotary vane vacuum pumps have the body consisting of the stator and covers made by sintered material, brass rotor, and hardened-steel vanes. Pumps are supplied duly fitted with A.C. single phase or D.C. motors.

They are used for creating vacuum, but sometimes they can also compress air. Pumps can be supplied either with single or double pump body.

The double body type allows the use both in parallel and in series. Rotary vane vacuum pumps are maintenance free.

Vuoto (Assoluto)/Vacuum (Abs.) (mbar)	Tipo/Type	Portata Nominale/Nominal capacity (L/min) - (50Hz)	(60Hz)
0 100 200 300 400 500 600 700 800 900 1013		0 5 10 15 20 25 30	
Parallelo/Parallel Serie/Series	R19D A.C.	Parallelo/Parallel	Parallelo/Parallel
Parallelo/Parallel Serie/Series	R15D A.C.	Parallelo/Parallel	Parallelo/Parallel
Parallelo/Parallel Serie/Series	R19S A.C.	Parallelo/Parallel	Parallelo/Parallel
Parallelo/Parallel Serie/Series	R15S A.C.	Parallelo/Parallel	Parallelo/Parallel

TIPO/TYPE		R19D A.C.		R15D A.C.		R19S A.C.	R15S A.C.
Portata nominale Nominal capacity	50Hz	Parallelo/Parallel	23	Parallelo/Parallel	19	12	9,5
		Serie/Series	12	Serie/Series	9,5		
	60Hz	Parallelo/Parallel	27	Parallelo/Parallel	23	14	11,5
		Serie/Series	14	Serie/Series	11,5		
Vuoto (Assoluto) Vacuum (Abs.)	mbar	Parallelo/Parallel	150	Parallelo/Parallel	150	150	150
		Serie/Series	30	Serie/Series	30		
Tensione Tension	volt	110/230 A.C.		110/230 A.C.		110/230 A.C.	110/230 A.C.
Dimensioni Dimensions	mm	196x102x83		179x102x83		163x102x83	145x102x83
Peso Weight	Kg.	2,390		2,070		1,870	1,460

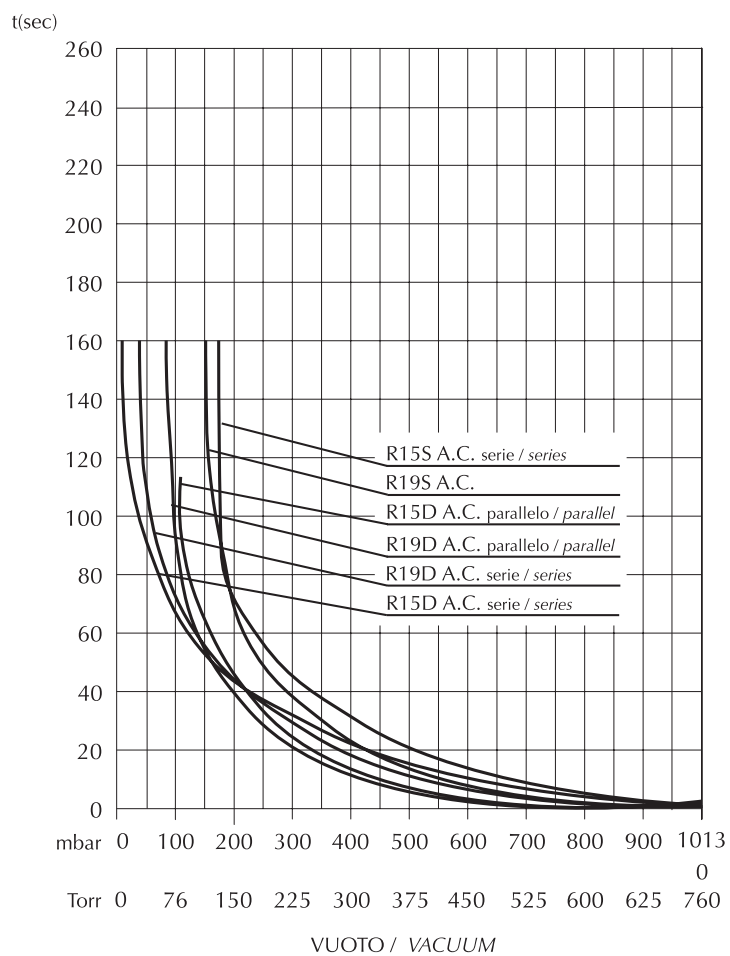

Curve della velocità di pompaggio di un serbatoio di 5 litri. (50Hz) / Pump down times for 5 litres vessel. (50Hz)



Strada S. Rocco, 17/A-B - 42027 Montecchio Emilia (RE) - Italy - Tel. (0522) 864736 - Fax (0522) 864761
E-mail: microvood@tin.it